# UL Series push around mast lifts



- Robust push-around mast lifts
- Patented Girder Lock mast design for stable working up to 14.1m
- Compact dimensions
- Passes through a standard doorway
- Easy loader system for flatbed vehicle transport




## **PUSH AROUND MAST LIFTS**


DIMENSIONS	UL25	UL32	UL40
Max. working height	9.6m	11.7m	14.1m
Max. platform height ( <b>A</b> )	7.6m	9.7m	12.1m
Platform length	0.56m	0.56m	0.56m
Platform width	0.66m	0.66m	0.66m
Outrigger footprint ( <b>B x C</b> )	2.06m x 1.99m	2.06m x 1.99m	2.95m x 2.85m
Overall width ( <b>F</b> )	0. 74m	0.74m	0.74m
Overall length ( <b>D</b> )	1.26m	1.32m	1.32m
Stowed height ( <b>E</b> )	1.99m	2.51m	2.9m
Tilt back height ( <b>G</b> )	1.95m	1.95m	2.0m
Tilt back length ( <b>H</b> )	2.6m	2.64m	2.99m

PERFORMANCE			
Platform capacity (SWL)	159kg	136kg	136kg
Max. wind speed	0m/s	0m/s	0m/s
Raise/lower time	43/23 seconds	57/26 seconds	60/40 seconds
Wheels	250mm x 64mm rear, 150mm casters front		
Controls		push button	
Wall access (Distance from platform front to w	356mm <sub>rall)</sub>	356mm	736mm

POWER					
Power source (AC)	120/220V AC 50HZ				
Power source (DC)	1 X 12V 105Ah battery				
WEIGHT					
Weight (AC)	390kg	435kg	470kg		
Weight (DC)	420kg	465kg	500kg		

### OUTRIGGER FOOTPRINT



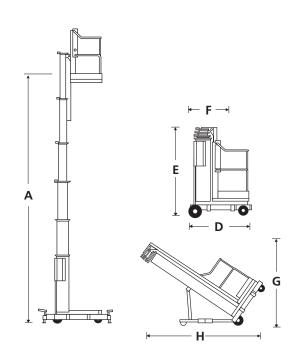

**UL** Series

#### STANDARD FEATURES

- Patented Girder Lock telescopic mast system
- Integrated tilt-back system
- Ground level entry
- EZ loader system for transport
- Outrigger interlock indicators
- Integrated battery charger (DC only)
- Non-marking wheels and casters
- 2 year parts & labour, 5 year structural warranty
- CE approved


#### **OPTIONS**

- Special paint colours
- Tool tray
- Laser locator
- Environmental hydraulic oil



Vigo Centre, Birtley Road, Washington, Tyne & Wear, NE38 9DA, U.K.

t: +44 (0) 845 1550 057 e: sales@snorkellif ts.com



#### CE Specification © Snorkel 2017